


48 cores Fiber Closure



General Features

1. Maximum capacity: 48 cores;
2. Outdoor optical cable for overhead, pipeline, such as laying direct buried;
3. Continuation and continuous differences, and to play a role in protecting joints;
4. General access cable port 4, the maximum diameter: $\varnothing 24$; minimum diameter: $\varnothing 6$;
5. Number of large core fiber optic cable can be allocated into each cell of the small corridor cable cores;
6. Cable in and out of the mouth with a small number of cores to meet the four fixed cable seal;
7. Out of the mouth in the same cable to meet the six fixed-wing cable seal;

Product structure

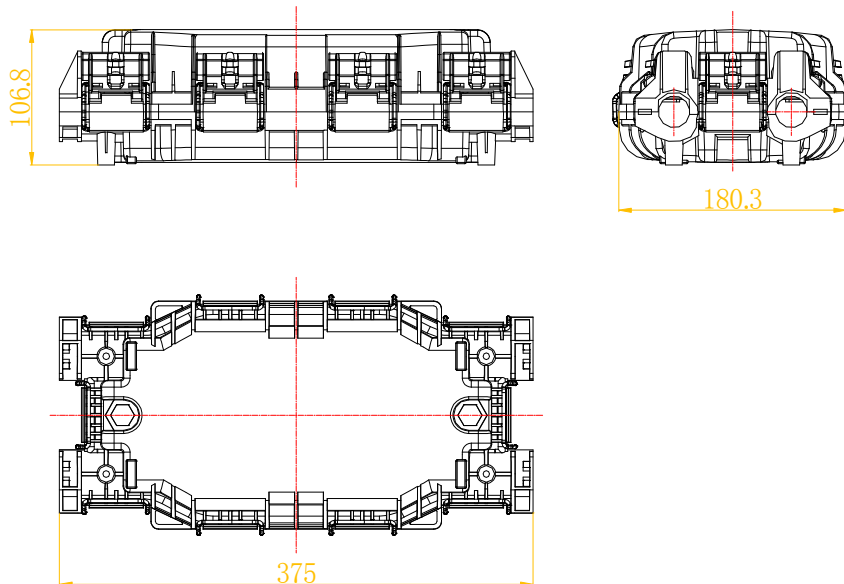

Ambient temperature

Temperature: Range: Ambient temperature: $-40\text{ }^{\circ}\text{C} \sim +60\text{ }^{\circ}\text{C}$

Relative Humidity: $\leq 85\%$ ($+30\text{ }^{\circ}\text{C}$)

Optical properties

Cable connector box of the remaining optical fiber coil placed in the device within the cable connector box installation operation, the fiber optic connectors should be no significant additional attenuation.

Sealing performance

Cable connector box sealed cases, the inflated air pressure of 2KG, soaked in water containers to ensure that no bubbles were observed, no leak, no cracks, no damage;

Sealing performance

Cable connector box test is repeated three times after packaging.

Inflation pressure for the cable connector box 1KG, soaked in the water container at room temperature stability of observation of 15 minutes without air bubbles escape, or the stability of observation 24 hours barometer indicates no change.

Electrical Characteristics

Insulation resistance:> $2 \times 10^4 M\Omega$

Compressive strength: 15KV (DC) / 1min without breakdown, flashover

Physical Characteristics

Plastic material: PP, ABS / PC, UL94V-0 outer structural parts: Stainless Steel

Internal structural parts: cold plate, aluminum alloy

mechanical properties

Tensile strength:> 1000N

Anti-stress:> 2000N/10cm² pressure, time 1min

Shock: cable connector box should be able to withstand the impact energy of 16N / m, the impact of up to 3 times;

Life

More than 30 years